


JVS-XD2808-HD12V

8CH 5-in-1 XVR




Key features

- AHD, TVI, CVI, CVBS, IP video input.
- Automatic networking support.
- Cloud services, P2P.
- H.264+ (Quasi H.265) video compressions.
- Third-party network cameras supported.
- Support IVP.

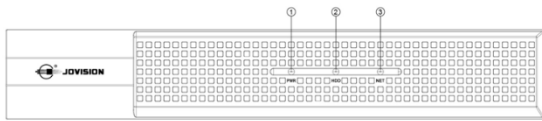

- ① Power Light ② HDD Light ③ Network indicator light

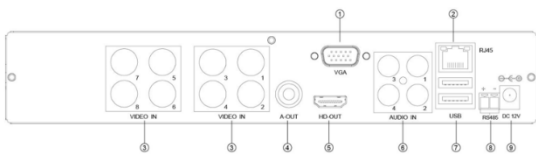

Index	Description	Index	Description
①	VGA Interface	⑥	AUDIO IN
②	LAN Network Interface	⑦	USB Interface
③	VIDEO IN	⑧	RS-485 Serial Interface
④	AUDIO OUT	⑨	12VDC Power Input
⑤	HDMI Interface		

Specifications

Model	JVS-XD2808-HD11V
Video and Audio	
Analog Camera Input	8Channel, BNC
HDCVI Camera	1080P@25/30fps, 720P@25/30fps
AHD Camera	4MP, 1080P@25/30, 720P@25/30fps
TVI Camera	1080P@25/30, 720P@25/30fps
CVBS Camera	PAL/NTSC
IP Camera Input	up to 1080P
Video port configuration	Full HD: 8CH
	Hybrid: 4CH + 4CH
	Full Network: 8CH
Audio In/Out	4/1, RCA
Two-way Talk	1CH RCA
Recording	
Compression	H.264+/H.264
Resolution	4M, 1080p, 1080n, 720p, WD1
Record Rate	Main stream: 4M(1~8fps), 1080P(1~20fps), 1080N/720P/960H/D1(1~20fps)
	Sub stream: D1/CIF(1~8/12fps)
Record Mode	Manual, Schedule (General, Continuous), MD (Motion Detection, Video Loss, IVP), Alarm Device
Audio Compression	G.711U
Display	
Interface	1x HDMI, 1x VGA
Resolution	1280x1024, 1024x768, 1280x800, 1440x900, 1920x1080
OSD	Device ID, Time, Record Setting, Alarm setup, Audio, Camera title
Network	
Interface	1 RJ-45 Port (100M)
Network Function	TCP/IP, DHCP, DNS, DDNS, HTTPS, HTTP,
Smart Phone	iPhone, Android
Interoperability	ONVIF
Playback and Backup	
Playback	8CH
Search Mode	Time /Date, Alarm, MD, IVP, Auto, Scheduled
Playback Function	Day view, Hour view, Back Step, Rewind, Pause, Play, Fast Forward, Slow, Step, Snap, Sound on/off, Zoom, Backup to U-Disk
Backup Mode	USB
HDD	
Interface Type	1 SATA Interface
Capacity	Up to 6 TB
General	
Power Supply	DC12V
Consumption	≤ 8 W
Working Temperature	0°C~ 55°C
Working Humidity	10% to 90%
Dimensions	260x255x45mm
Weight	≤ 950g
EAN	6938449001033