



EMC TEST REPORT

On Behalf of

Sunivision Technology Development Company Limited

Wifi camera

Model No.: See the Annex for details

Prepared for : Sunivision Technology Development Company Limited
Address : Floor 3, Building B, TaoYuan Industrial Park, Huangpu East
Development Zone, Guangzhou, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

Report Number : A2102076-C01-R02
Date of Receipt : March 4, 2021
Date of Test : March 4, 2021 – March 22, 2021
Date of Report : March 22, 2021
Version Number : V0

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. General Information	6
1.1. Description of Device (EUT)	6
1.2. Accessories of Device (EUT)	7
1.3. Ancillary Equipment Details	7
1.4. Test Lab Information	7
2. Summary of Measurement	8
2.1. Test Standard Description	8
2.2. Performance criteria description	9
2.3. Summary of Test Result	10
2.4. Block Diagram of Configuration for Test	11
2.5. Test Mode	11
2.6. Test Conditions	11
2.7. Measurement Uncertainty (95% confidence levels, k=2)	12
2.8. Test Equipment	13
3. Conducted Emission	15
3.1. Limit for AC Mains Port	15
3.2. Test Procedure	15
3.3. Test Setup	15
3.4. Operation Condition of EUT	16
3.5. Test Result	16
4. Radiated Emission	18
4.1. Limit	18
4.2. Test Setup	18
4.3. Test Procedure	20
4.4. Operation Condition of EUT	20
4.5. Test Result	21
5. Harmonic Current Emissions	23
5.1. Test Procedure	23
5.2. Limit	23
5.3. Test Setup	23
5.4. Operation Condition of EUT	24
5.5. Test Result	24
6. Voltage Fluctuations and Flicker	25
6.1. Test Procedure	25
6.2. Limit	25
6.3. Test Setup	25
6.4. Operation Condition of EUT	25
6.5. Test Result	25
7. RF Electromagnetic Field	28
7.1. Test Levels and Performance Criteria	28

7.2. Test Procedure	28
7.3. Test Setup	29
7.4. Operation Condition of EUT	29
7.5. Test Result	30
8. Electrostatic Discharge	31
8.1. Test Level and Performance Criteria	31
8.2. Test Procedure	31
8.3. Test Setup	32
8.4. Test Result	32
9. Fast Transients Test	33
9.1. Test Levels and Performance Criteria	33
9.2. Test Procedure	33
9.3. Test Setup	34
9.4. Test Result	34
10. Injection Current Test	35
10.1. Test Level and Performance Criteria	35
10.2. Test Procedure	35
10.3. Test Setup	35
10.4. Test Result	36
11. Voltage Dips and Interruptions	37
11.1. Test Level and Performance Criteria	37
11.2. Test Procedure	37
11.3. Test setup	37
11.4. Test Result	38
12. Surge Test	39
12.1. Test Level and Performance Criteria	39
12.2. Test Procedure	39
12.3. Test Setup	40
12.4. Test Result	40
13. Photos of Test Setup	42
13.1. Photos of Radiated Emission	42
13.2. Photos of Power Line Conducted Emission Test	43
13.3. Photos of Electrostatic Discharge Immunity Test	43
13.4. Photos of RF test	44
13.5. Photos of Harmonic & Flicker Test	44
13.6. Photo of Surge, Voltage Dips and interruptions, Electrical Fast Transient/Burst Immunity Test ..	45
13.7. Photo of Injected Currents Susceptibility test	45
14. Photos of EUT	46
Annex	57

TEST REPORT DECLARATION

Applicant : Sunivision Technology Development Company Limited

Address : Floor 3, Building B, TaoYuan Industrial Park, Huangpu East Development Zone,
Guangzhou, China

Manufacturer : Sunivision Technology Development Company Limited

Address : Floor 3, Building B, TaoYuan Industrial Park, Huangpu East Development Zone,
Guangzhou, China

EUT Description : Wifi camera

(A) Model No. : See the Annex for details

(B) Trademark : N/A

Measurement Standard Used:

ETSI EN 301 489-1 V2.2.3:2019

ETSI EN 301 489-17 V3.2.4:2020

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the ETSI EN 301 489-1 and ETSI EN 301 489-17 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Lucas Pang
Project Engineer

Approved by (name + signature).....: Simple Guan
Project Manager

Date of issue.....: March 22, 2021



Revision History

Revision	Issue Date	Revisions	Revised By
V0	March 22, 2021	Initial released Issue	Lucas Pang

1. General Information

1.1. Description of Device (EUT)

EUT Name	:	Wifi camera
Trademark	:	N/A
Model No.	:	See the Annex for details
DIFF.	:	There is no difference except for the appearance, shape and model name. So all the test were performed on the model AP-107W1Y-2MP-TY.
Power supply	:	DC 5V from adapter
2.4G WIFI	:	
Operation frequency	:	2412MHz-2472MHz for IEEE 802.11 b, g, n/HT20 2422MHz-2462MHz for IEEE 802. 11 n/HT40.
Channel No.	:	802.11b/802.11g /802.11n(HT20): 13CH 802.11(HT40): 9CH
Modulation type	:	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n :OFDM(64QAM, 16QAM, QPSK, BPSK)
Antenna Type	:	Internal antennal, Maximum Gain is 1.0dBi
Software version	:	V1.0
Hardware version	:	V1.0
Intend use environment	:	Residential, commercial and light industrial environment

1.2. Accessories of Device (EUT)

Accessories1 : AC Adapter
Manufacturer : Shenzhen ShiAn Power Tehnology Co.,Ltd
Model : SA-0501500EUU
OUTPUT : 100-240V~50/60Hz
0.35A MAX
Output Power : 7.5W

1.3. Ancillary Equipment Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1	N/A	N/A	N/A	N/A	N/A

1.4. Test Lab Information

Shenzhen Alpha Product Testing Co., Ltd
Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

2. Summary of Measurement

2.1. Test Standard Description

ETSI EN 301 489-1 V2.2.3:2019: ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU and the essential requirements of article 6 of Directive 2014/30/EU

ETSI EN 301 489-17 V3.2.4 ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for Broadband Data Transmission Systems; Harmonised Standard for ElectroMagnetic Compatibility.

2.2. Performance criteria description

According to EN 301 489 -17 standard, the general performance criteria as following:

The performance criteria are:

- performance criteria A for immunity tests with phenomena of a continuous nature;
- performance criteria B for immunity tests with phenomena of a transient nature;
- performance criteria C for immunity tests with power interruptions exceeding a certain time.

The equipment shall meet the minimum performance criteria as specified in the following clauses.

Performance criteria overview

Criteria	During test	After test (i.e. as a result of the application of the test)
A	Shall operate as intended. (See note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of critical stored data.
B	May be loss of function.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.
C	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data.
NOTE: Operate as intended during the test allows a level of degradation in accordance with clause 6.2.2.		

Minimum performance level

For equipment that supports a PER or FER, the minimum performance level shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER, the minimum performance level shall be no loss of the wireless transmission function needed for the intended use of the equipment.

Performance criteria for Continuous phenomena

The performance criteria A shall apply.

Where the EUT is a transmitter in standby mode, unintentional transmission shall not occur during the test.

Where the EUT is a transceiver in receive mode, unintentional transmission shall not occur during the test.

Performance criteria for Transient phenomena

The performance criteria B shall apply, except for voltage dips greater than or equal to 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply.


Where the EUT is a transmitter in standby mode, unintentional transmission shall not occur as a result of the application of the test.

Where the EUT is a transceiver in receive mode, unintentional transmission shall not occur as a result of the application of the test.

2.3. Summary of Test Result

No.	Test Parameter	Application	Results
EMC emission			
1	Radiated emission	Enclosure of ancillary equipment	PASS
2	Conducted emission	DC power input/output port	N/A
3	Conducted emission	AC mains input/output port	PASS
4	Harmonic Current Emissions	AC mains input port	N/A
5	Voltage Fluctuation & Flicker	AC mains input port	N/A
6	Conducted emission	Telecommunication port	N/A
Immunity			
7	RF electromagnetic field	Enclosure	PASS
8	Electrostatic Discharge	Enclosure	PASS
9	Fast transients common mode	Signal,telecommunication and control ports,DC and AC power ports	PASS
10	RF Common mode	Signal,telecommunication and control ports,DC and AC power ports	PASS
11	Transients and Surges	DC power input ports for vehicular use	PASS
12	Voltage dips and interruptions	AC mains power input ports	PASS
13	Surges, line to line and line to ground	AC mains power input ports, wired network ports	PASS
<p>Note: N/A means this test item is not applicable for this device. Cause EUT belongs to portable Equipment, so test items reference to ETSI EN 301 489-1 V2.2.3 Clause 7.1 and 7.2</p> <p>Note: This device is also belongs to information technology equipment, and most of EN55032 and EN55035's test items are included in ETSI EN301 489. So most of EN55032 and EN55035's tests were performed together with EN301 489's test.</p>			

2.4. Block Diagram of Configuration for Test



2.5. Test Mode

Number	Test mode	Radiated emission	Conducted emission	Harmonic Current Emissions	Voltage Fluctuation & Flicker
Mode 1	2.4G WIFI Link	※	※	/	※
	Note: 1: ※ is worst case mode. 2. EMS test items are required for all modes.				

2.6. Test Conditions

Items	Required
Temperature range	21-25℃
Humidity range	30-60%
Pressure range	86-106kPa

2.7. Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Conducted Emission Test	2.74dB	
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB	Polarize: V
	3.80dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.16dB	Polarize: H
	4.13dB	Polarize: V
Uncertainty for radio frequency	5.4×10^{-8}	
Uncertainty for conducted RF Power	0.37dB	

2.8. Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due day
Test Receiver	R&S	ESCI	101165	2020.09.02	2021.09.01
Test Receiver	R&S	ESR	1316.3003K03-102082-Wa	2020.09.02	2021.09.01
Loop Antenna	SCHWARZBECK	FMZB 1519B	000059	2019.09.07	2021.09.06
Bilog Antenna	Schwarzbeck	VULB 9168	9168-438	2019.09.07	2021.09.06
Spectrum analyzer	R&S	FSV40-N	102137	2020.09.02	2021.09.01
Spectrum analyzer	R&S	FSU	1166.1660.26	2020.09.02	2021.09.01
Amplifier	HP	HP8347A	2834A00455	2020.09.02	2021.09.01
Amplifier	Agilent	8449B	3008A02664	2020.09.02	2021.09.01
Horn Antenna	Schwarzbeck	BBHA 9120 D	BBHA 9120 D(1201)	2020.04.12	2022.04.11
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126-466	2020.09.02	2021.09.01
L.I.S.N.#2	R&S	ENV216	101043	2020.09.02	2021.09.01
I.S.N.	FCC	FCC-TLISN-T8-02	20354	2020.09.02	2021.09.01
Pulse Limiter	Schwarzbeck	9516F	9618	2020.09.02	2021.09.01
Harmonics Flicker Analyser	Voltech	PM6000	200006700495	2020.09.02	2021.09.01
ESD Tester	HAEFELY	PESD1610	H310546	2020.09.02	2021.09.01
RF-Generator	Frankonia	CIT-10/75	12681247/2013	2020.09.02	2021.09.01
Fixed Coaxial Attenuator (6dB Attenuation)	CD	ATT-0675	120540086	2020.09.02	2021.09.01
Coupling-Decoupling Network (CDN)	CD	CDN M2/M3	2302	2020.09.02	2021.09.01
Electromagnetic Injection Clamp (EMC-Clamp)	CD	EM-Clamp	0513A031201	2020.09.02	2021.09.01
Main Interference Simulator	3ctest	VDG-1105G	EC0171002	2020.09.02	2021.09.01
Burst Tester	3ctest	EFT-4001G	EC0461015	2020.09.02	2021.09.01
Capacitive Coupling	3ctest	EFTC	EC0441049	2020.09.02	2021.09.01
Surge CDN	3ctest	SGN-5010G	EC5591004	2020.09.02	2021.09.01
Surge Generator	3ctest	SG-5006G	EC5581006	2020.09.02	2021.09.01
Base station	Agilent	E4438C	US44271917	2020.09.02	2021.09.01
Universal Radio Communication Tester	R&S	CMU200	116785	2020.09.02	2021.09.01
Signal Generator	Agilent	N5182A	MY49060042	2020.09.02	2021.09.01
vector Signal Generator	Agilent	E4438C	US44271917	2020.09.02	2021.09.01
Power meter	Agilent	E4419B	GB40202122	2020.09.02	2021.09.01
Power Sensor	Agilent	E9300A	MY41496628	2020.09.02	2021.09.01
RF power Amplifier	OPHIR	5225R	1045	N/A	NCR
RF power Amplifier	OPHIR	5273R	1018	N/A	NCR

Antenna	SCHWARZBECK	STLP9128E-special	STLP9128E s#139	N/A	NCR
Antenna	SCHWARZBECK	STLP9128E-special	STLP 9149 #456	N/A	NCR
CMW500	R&S	CMW500	1201.0002K50- 117239-sM	2020.09.02	2021.09.01

3. Conducted Emission

3.1. Limit for AC Mains Port

Frequency	Quasi-Peak Level dB (μ V)	Average Level dB (μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.


3.2. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT was power charged from notebook which powered from power mains through a line impedance stabilization network (L.I.S.N. 1#). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.3#). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to the EN55032 regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked. The test result are reported on Section 3.6

3.3. Test Setup

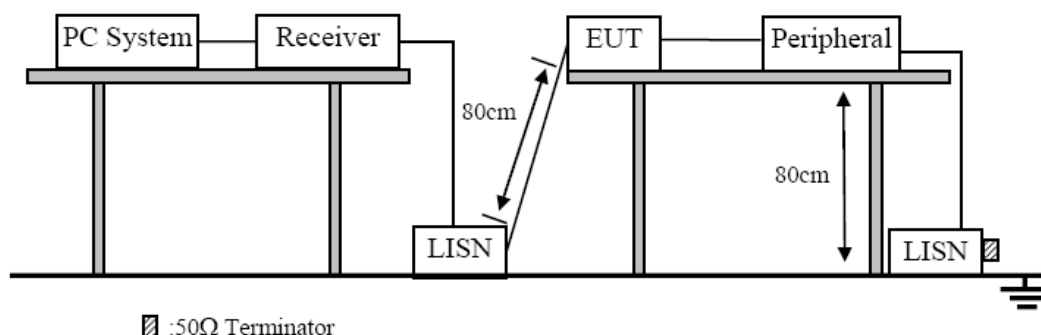


3.4. Operation Condition of EUT

- 1, Setup the EUT and the simulators as shown on Section 3.3
- 2, Turned on the power of all equipments.
- 3, EUT transmit though EUT and notebook.


3.5. Test Result

See below original test data.

L:

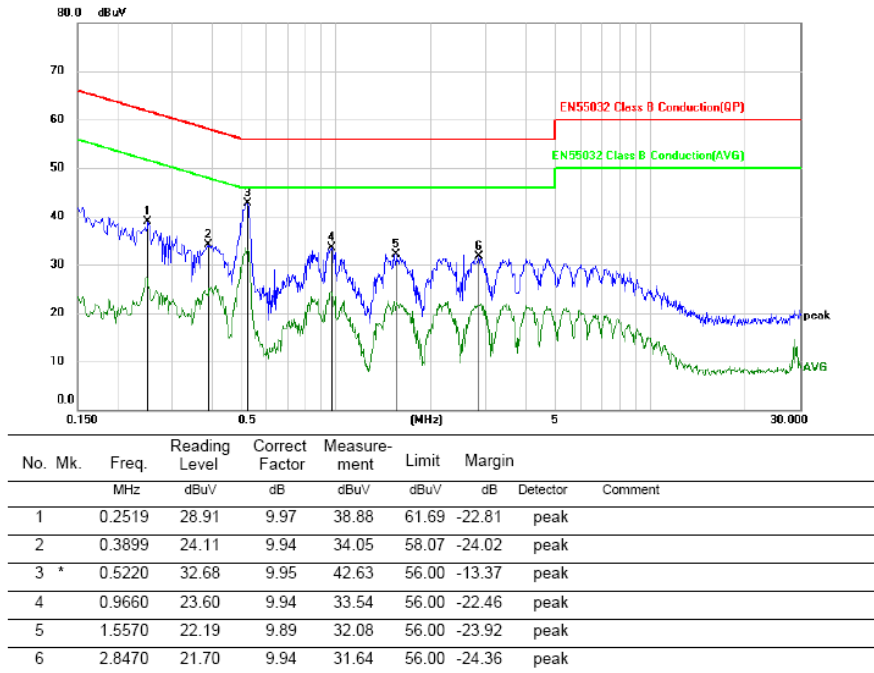

N:

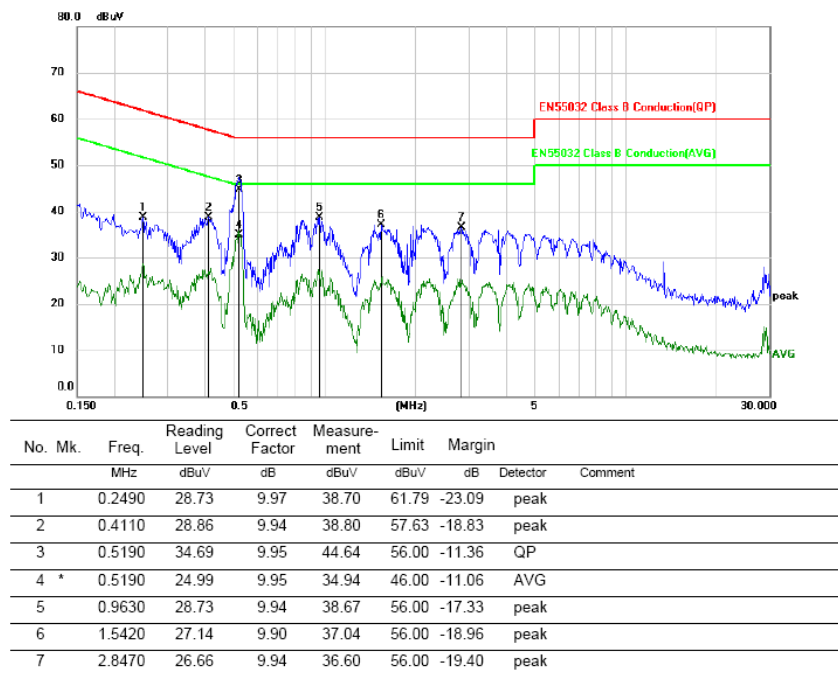

Note: 1.The test voltage is from adapter input AC 230V/50Hz. All modes have been tested, and only worst data was listed in this report (2.4G WIFI Link).

4. Radiated Emission


4.1. Limit

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMITS (dB μ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47
1000-3000	3	Average limit:50 Peak limit:70
3000-6000	3	Average limit:54 Peak limit:74


Note: The lower limit shall apply at the transition frequencies.

4.2. Test Setup


Semi Anechoic Chamber (3m) Test Setup Diagram for Below 1GHz

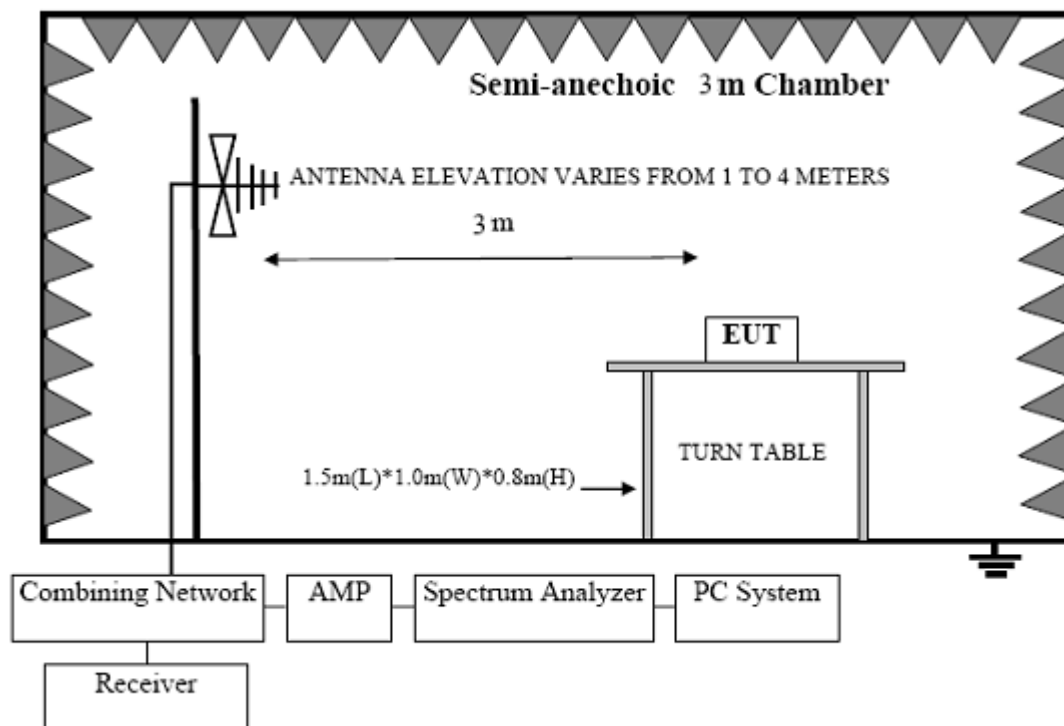

Semi Anechoic Chamber (3m) Test Setup Diagram for Above 1GHz

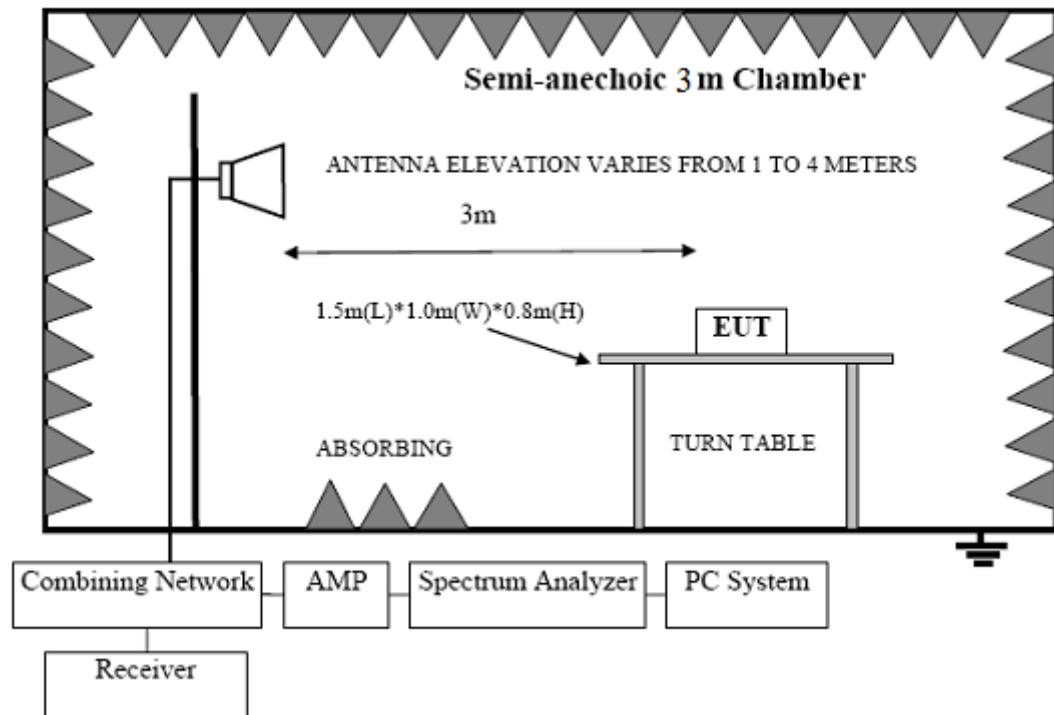

For 3m distance description:

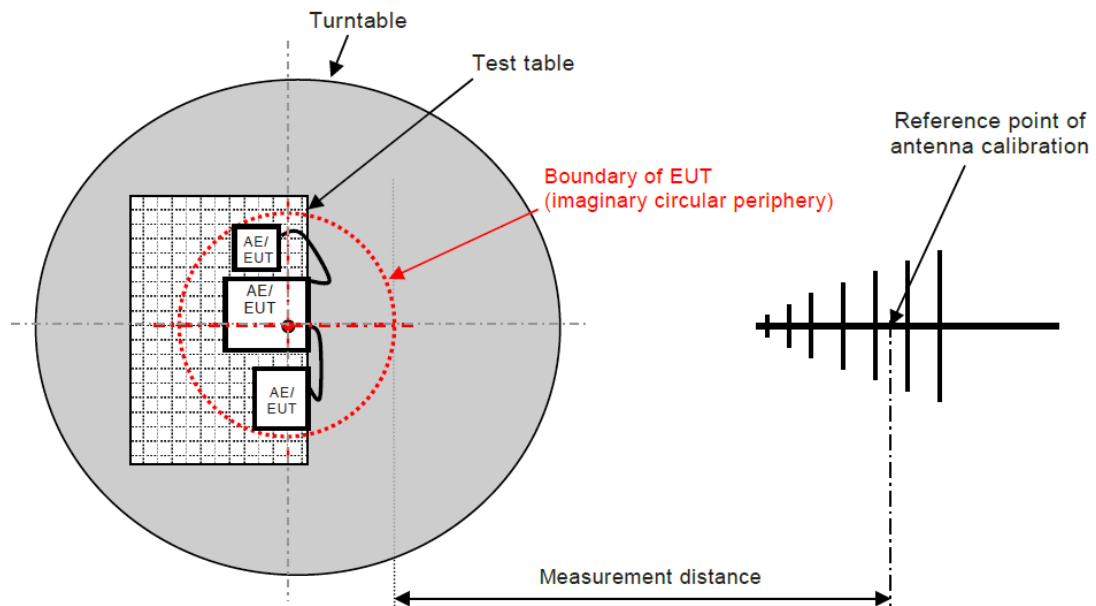

4.3. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane inside a semi-anechoic chamber. An antenna was located 10m from the EUT for below 1GHz test and 3m for above 1GHz test on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to EN 55032 Class B on Radiated Disturbance test.

The bandwidth setting on the test receiver (R&S TEST RECEIVER ESR) is 120 kHz for below 1GHz test. For emission above 1GHz, The Spectrum's RWB is set 1MHz and VBW 1MHz to measure Peak Level.

4.4. Operation Condition of EUT


- 1, Setup the EUT and the simulators as shown on Section 4.2
- 2, Turned on the power of all equipments.
- 3, EUT transmit through EUT and notebook.

4.5. Test Result

See below original test data.


For 30MHz-1000MHz :

Horizontal :

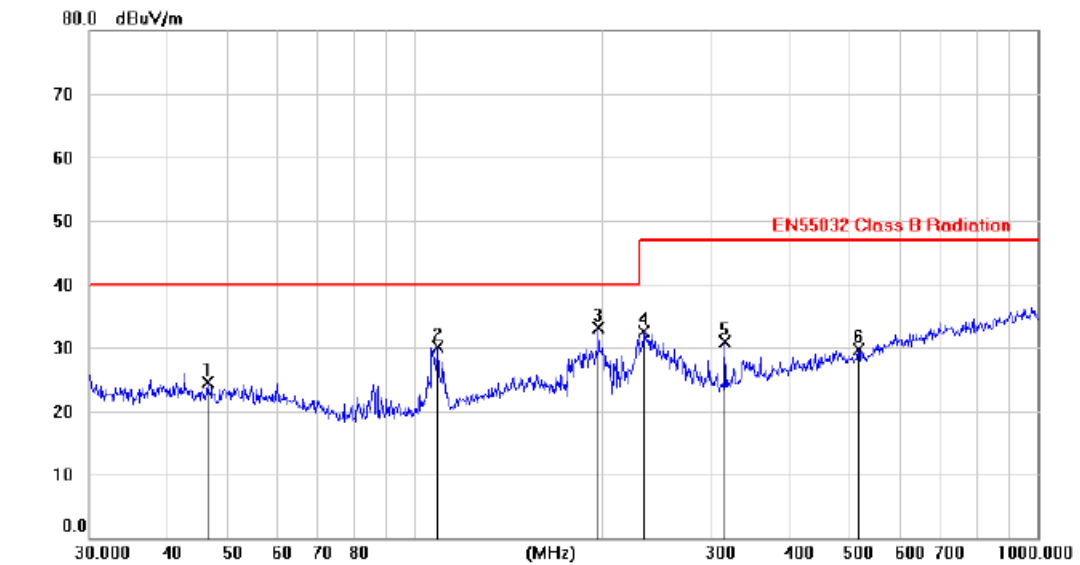

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		46.4596	10.50	14.09	24.59	40.00	-15.41	peak		
2		108.8377	18.30	11.72	30.02	40.00	-9.98	peak		
3	*	197.6615	22.04	11.03	33.07	40.00	-6.93	peak		
4		233.6216	20.16	12.40	32.56	47.00	-14.44	peak		
5		314.8545	16.43	14.48	30.91	47.00	-16.09	peak		
6		517.0666	11.23	18.53	29.76	47.00	-17.24	peak		

Vertical:

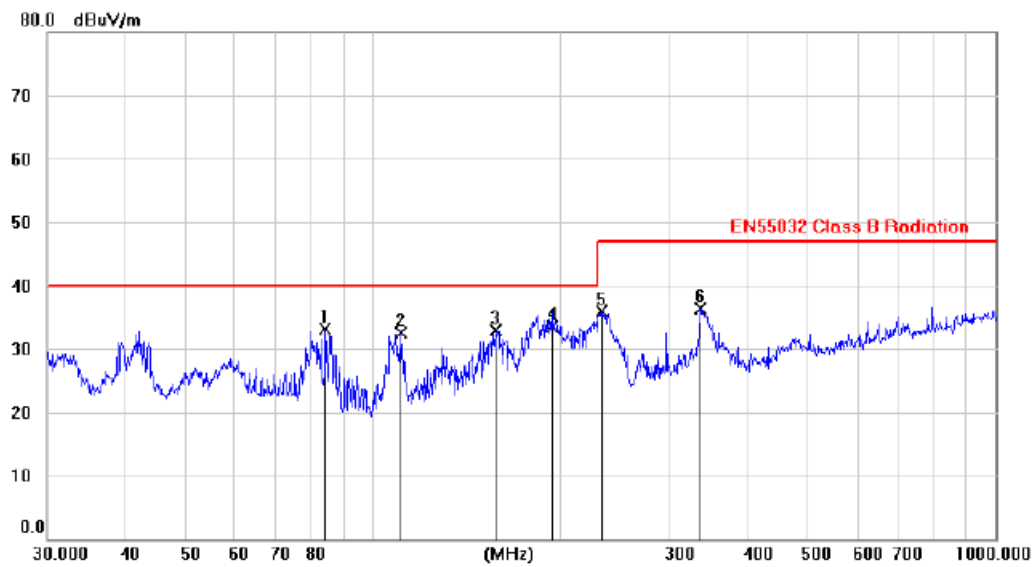

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		83.9921	23.16	9.95	33.11	40.00	-6.89	peak		
2		110.7627	20.64	11.92	32.56	40.00	-7.44	peak		
3		157.6326	17.93	15.04	32.97	40.00	-7.03	peak		
4	*	194.3171	22.34	11.22	33.56	40.00	-6.44	QP		
5		233.5124	23.43	12.39	35.82	47.00	-11.18	peak		
6		335.9959	21.40	14.98	36.38	47.00	-10.62	peak		

Note: 1. The test voltage is DC 5V by adaptor; All modes have been tested, and only worst data was listed in this report (2.4G WIFI Link).

2. For 1-6GHz results are 20dB lower against the limit, so they are not shown in this report.

5. Harmonic Current Emissions

5.1. Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT was powered from notebook which's power was connected to the power mains through a power Analyzer, let EUT worked in test mode then measure Harmonic current emissions by power analyzer and recorded data.

5.2. Limit

Limits for Class A equipment	
Harmonic order n	Maximum permissible Harmonic current A
Odd harmonics	
3	2,30
5	1,14
7	0,77
9	0,40
11	0,33
13	0,21
$15 \leq n \leq 39$	$0,15 \frac{15}{n}$
Even harmonics	
2	1,08
4	0,43
6	0,30
$8 \leq n \leq 40$	$0,23 \frac{8}{n}$

Remark: if the EUT Power level is below 75 Watts and therefore has no defined limits.

5.3. Test Setup

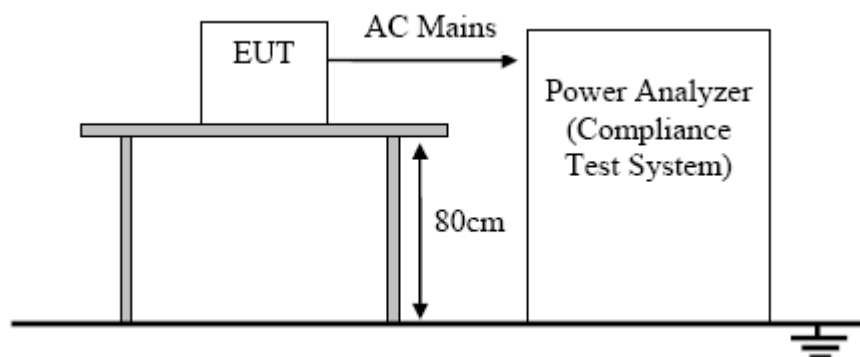

5.4. Operation Condition of EUT

- 1, Setup the EUT and the simulators as shown on Section 5.3
- 2, Turned on the power of all equipments.
- 3, EUT transmit data with notebook

5.5. Test Result

Not applicable for the equipment's power less than 75W.

6. Voltage Fluctuations and Flicker


6.1. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT was powered from notebook which's power through a power Analyzer, let EUT worked in test mode then measure voltage fluctuations and flicker by power analyzer and recorded data.

6.2. Limit

Test Item	Limit	Note
P_{st}	1.0	P_{st} means Short-term flicker indicator
P_{lt}	0.65	P_{lt} means long-term flicker indicator
T_{dt}	0.2	T_{dt} means maximum time that dt exceeds 3%
$d_{max}(\%)$	4%	d_{max} means maximum relative voltage change.
$d_c(\%)$	3%	d_c means relative steady-state voltage change.

6.3. Test Setup

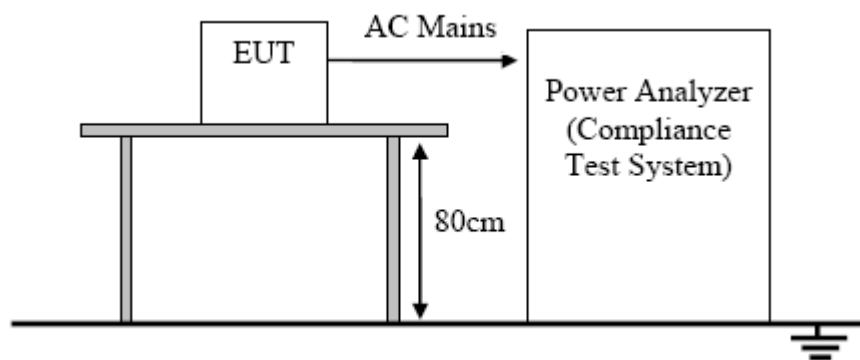

6.4. Operation Condition of EUT

- 1, Setup the EUT and the simulators as shown on Section 6.3
- 2, Turned on the power of all equipments.
- 3, EUT transmit data with notebook


6.5. Test Result

Pass.

The test result is in below pages.

ALPHA		
Product:	WIFI CAMERA	2021 Mar 12 17:02
Serial no:	AP-107W1Y-2MP-TY	Page 1 of 2
Description:	2.4G WIFI Link	
Result Name:	A2102076-C01-M04 F	
Voltech IEC61000-3 Windows Software 1.24.12		Test Date: 2021 Mar 12 16:51
Type of Test:	Flickermeter Test - Pst Curve	
Power Analyzer:	Voltech PM6000 SN: 200006700495 Firmware Version: v1.22.07RC6	
Channel(s):	1. SN: 090015501951, 28 Adjusted Date: 16 APR 2013. 2. SN:None Adjusted Date:None 3. SN:None Adjusted Date:None 4. SN:None Adjusted Date:None 5. SN:None Adjusted Date:None 6. SN:None Adjusted Date:None	
Shunt(s):	1. SN: 091024301771, 4 Adjusted Date: 16 APR 2013. 2. SN:None Adjusted Date:None 3. SN:None Adjusted Date:None 4. SN:None Adjusted Date:None 5. SN:None Adjusted Date:None 6. SN:None Adjusted Date:None	
AC Source:	Mains / Manual Source	
Overall Result:	Notes:	
PASS	Measurement method - Voltage	

Pst Curve 1

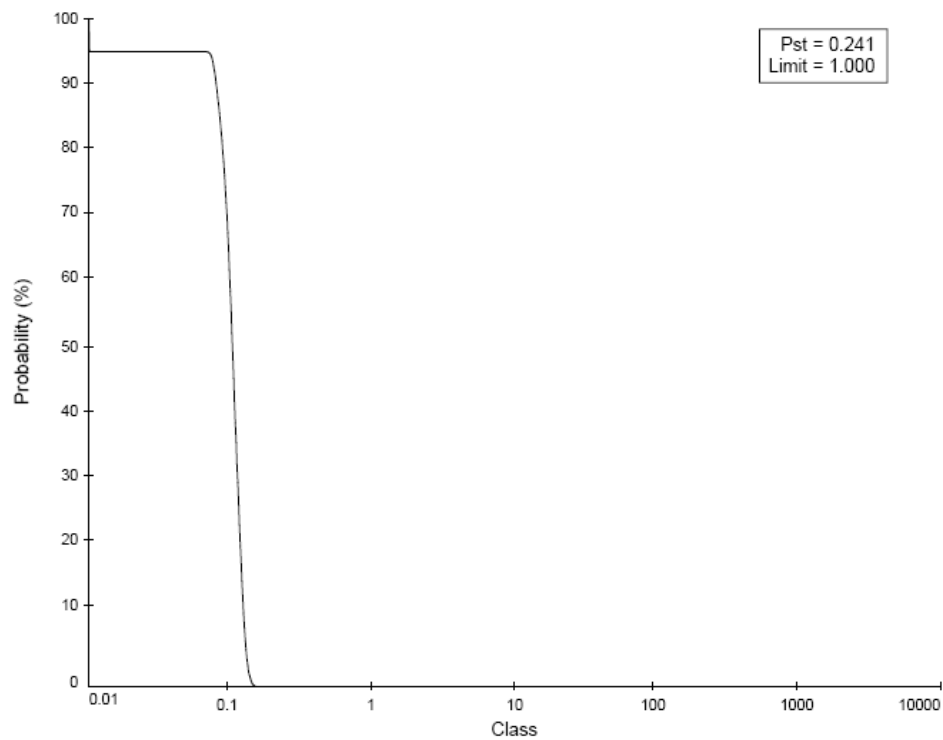

ALPHA				
Product:	WIFI CAMERA			2021 Mar 12 17:02
Serial no:	AP-107W1Y-2MP-TY			Page 2 of 2
Description:	2.4G WIFI Link			
Result Name:	A2102076-C01-M04 F			
Voltech IEC61000-3 Windows Software 1.24.12			Test Date: 2021 Mar 12 16:51	
Type of Test:	Flickermeter Test - Table			
Power Analyzer:	Voltech PM6000 SN: 200006700495 Firmware Version: v1.22.07RC6			
	Channel(s):			
	1. SN: 000015501051, 28 Adjusted Date: 10 APR 2013. 2. SN:None Adjusted Date:None			
	3. SN:None Adjusted Date:None 4. SN:None Adjusted Date:None			
	5. SN:None Adjusted Date:None 6. SN:None Adjusted Date:None			
	Shunt(s):			
	1. SN: 001024301771, 4 Adjusted Date: 10 APR 2013. 2. SN:None Adjusted Date:None			
	3. SN:None Adjusted Date:None 4. SN:None Adjusted Date:None			
	5. SN:None Adjusted Date:None 6. SN:None Adjusted Date:None			
AC Source:	Mains / Manual Source			
Overall Result:	Notes:			
PASS	Measurement method - Voltage			

	Pst	dc (%)	dmax (%)	d(t) > 3.3%(ms)
Limit	1.000	3.300	4.000	500
Reading 1	0.241	0.000	0.552	0

7. RF Electromagnetic Field

7.1. Test Levels and Performance Criteria

Test Level		Performance Criteria
Frequency	80MHz-6000MHz	A
Field Strength	3V/m measured unmodulated	
Modulation	AM modulated to a depth of 80% by a sinusoidal audio signal of 1KHz(Note)	
Step Size	1% increments	
Dwell time	3 Sec.	


7.2. Test Procedure

The field sensor is placed on the EUT table (0.8 meter above the ground) which is 3 meters away from the transmitting antenna. Through the signal generator, power amplifier and transmitting antenna to produce a uniformity field strength (3V/m measured by field sensor) around the EUT table from frequency range specified and records the signal generator's output level at the same time for whole measured frequency range. Then, put EUT and its simulators on the EUT turn table and keep them 3 meters away from the transmitting antenna which is mounted on an antenna tower and fixes at 1 meter height above the ground. Using the recorded signal generator's output level to measure the EUT from frequency range specified and both horizontal & vertical polarization of antenna must be set and measured. Each of the four sides of EUT must be faced this transmitting antenna and measures individually.


Set EUT in idle mode and repeated test with a receive antenna connected to a spectrum analyzer to see if there was unintentional transmissions happened.

7.3. Test Setup

For frequency from 80MHz to 1GHz

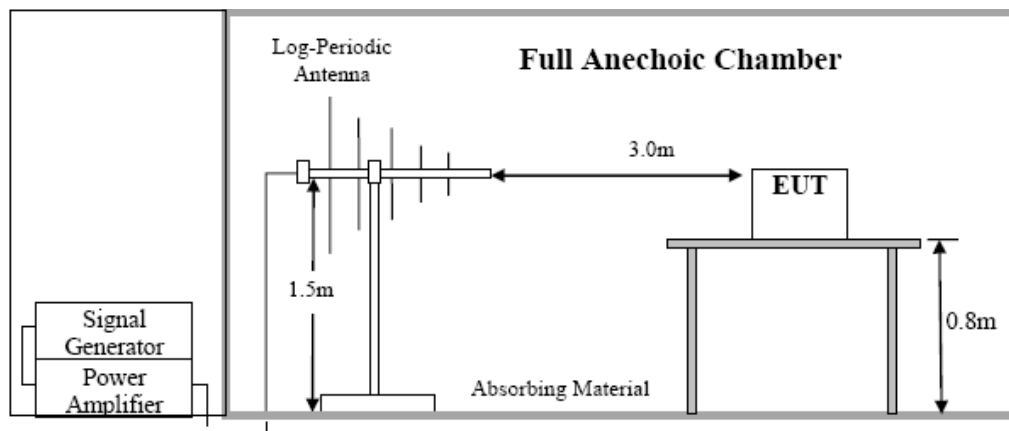

Frequency For 1-6GHz

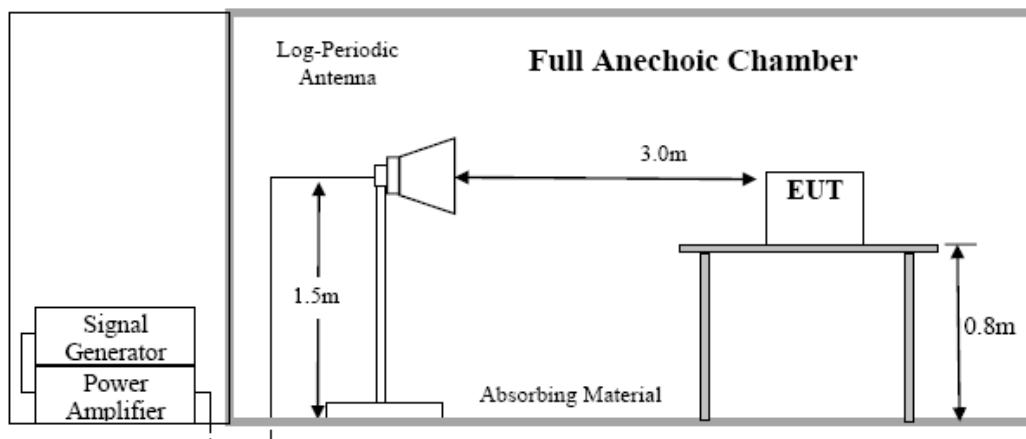

7.4. Operation Condition of EUT

- 1, Setup the EUT and the simulators as shown on Section 7.3
- 2, Turned on the power of all equipments.
- 3, EUT transmit data with notebook

7.5. Test Result

EUT Position	Antenna	R.F. Field Strength	Test frequency	Observation	Perform. Criteria	Conclusion
Front	H/V	3 V/m (rms) AM Modulated 1000Hz, 80%	80-1000MHz/ 1000-6000MHz	A	A	PASS
Right	H/V				A	PASS
Rear	H/V				A	PASS
Left	H/V				A	PASS

Note: The minimum performance level per is less than 10%.

8. Electrostatic Discharge

8.1. Test Level and Performance Criteria

Test Level		Performance Criteria
Air Discharge	$\pm 2\text{kV}$, $\pm 4\text{kV}$ and $\pm 8\text{kV}$	B
Contact Discharge	$\pm 2\text{kV}$ and $\pm 4\text{kV}$	

8.2. Test Procedure

Air discharge:

The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 20 times for each pre-selected test point. This procedure was repeated until all the air discharge completed

Contact Discharge:

All the procedure was same as air discharge. except that the generator was re-triggered for a new single discharge and repeated 50 times for each pre-selected test point. The tip of the discharge electrode was touching the EUT before the discharge switch was operated.

Indirect discharge for horizontal coupling plane


At least 20 single discharges were applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

Indirect discharge for vertical coupling plane

At least 20 single discharges were applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

Set EUT in idle mode and repeated test with a receive antenna connected to a spectrum analyzer to see if there was unintentional transmissions happened.

8.3. Test Setup

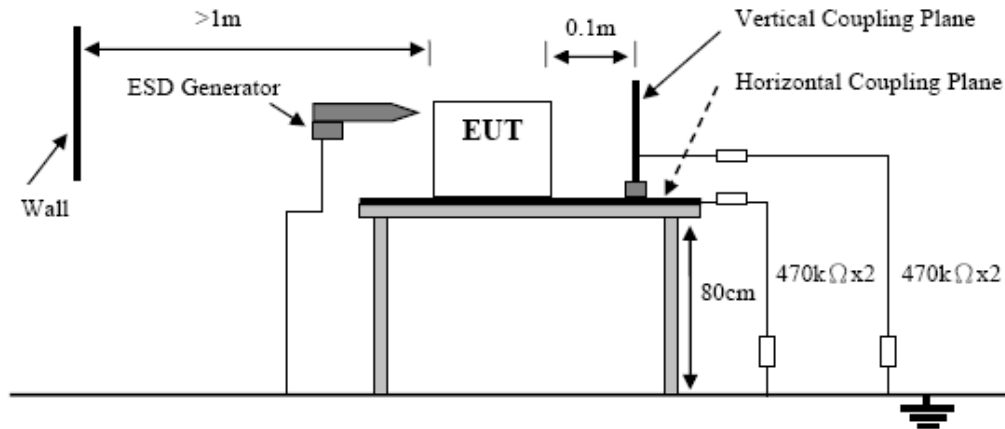

8.4. Test Result

Discharge Voltage (kV)	Type of discharge	Dischargeable Points	Observation	Perform. Criteria	Conclusion
±2	Contact	/	/	B	/
±4	Contact	/	/	B	/
±2	Air	1,2,3,4,5,6	A	B	PASS
±4	Air	1,2,3,4,5,6	A	B	PASS
±8	Air	1,2,3,4,5,6	A	B	PASS
±2	HCP-Bottom	Edge of the HCP	A	B	PASS
±2	VCP-Front	Center of the VCP	A	B	PASS
±2	VCP-Left	Center of the VCP	A	B	PASS
±2	VCP-Back	Center of the VCP	A	B	PASS
±2	VCP-Right	Center of the VCP	A	B	PASS
±4	HCP-Bottom	Edge of the HCP	A	B	PASS
±4	VCP-Front	Center of the VCP	A	B	PASS
±4	VCP-Left	Center of the VCP	A	B	PASS
±4	VCP-Back	Center of the VCP	A	B	PASS
±4	VCP-Right	Center of the VCP	A	B	PASS
Operation as intend, no loss of function during test and after test.					
Discharge Points Description					
Note: The minimum performance level per is less than 10%.					
1	Gap		4	TF-Card Port	
3	Camera		5	USB Port	
2	Key		6	Micro Port	

9. Fast Transients Test

9.1. Test Levels and Performance Criteria

Test Level		Performance Criteria
Test voltage	1KV For AC mains Port	B
	0.5KV for wired network ports	
Repetition Frequency	5KHz	
Burst Duration	15ms	
Burst Period	300ms	
Inject Time(s)	120s	
Inject Method	Direct For AC mains port	
	Couple for wired network ports	
Inject Line	AC Mains of adapter and wired network ports	


9.2. Test Procedure

The EUT and its simulators were placed on the ground reference plane and were insulated from it by a wood support $0.1\text{m} \pm 0.01\text{m}$ thick. The ground reference plane was $1\text{m} \times 1\text{m}$ metallic sheet with 0.65mm minimum thickness. This reference ground plane was project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables.

The EUT was powered from notebook which powered from power mains by using a coupling device that couples the EFT interference signal to AC power lines. Both positive transients and negative transients of test voltage were applied during compliance test and the duration of the test can't less than 1min.

Set EUT in idle mode and repeated test with a receive antenna connected to a spectrum analyzer to see if there was unintentional transmissions happened.

9.3. Test Setup

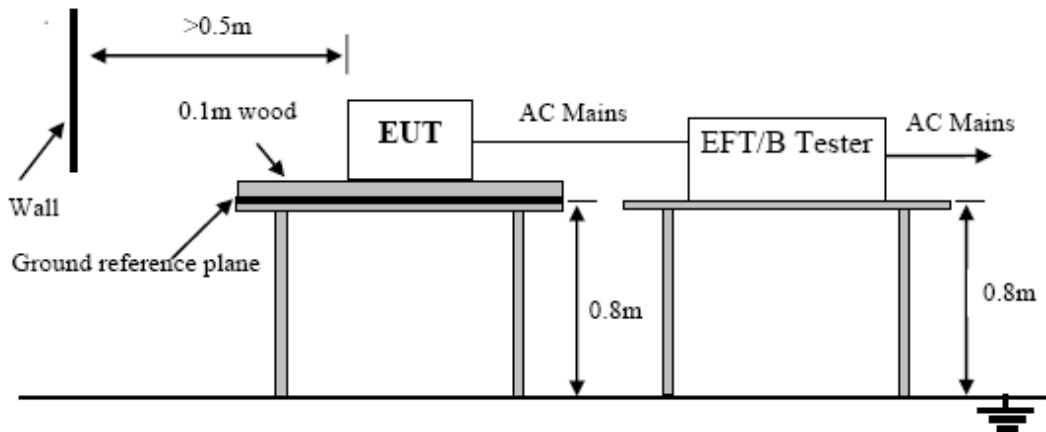

9.4. Test Result

Line	Test Voltage		Observation	Criterion	Conclusion
L	/	$\pm 1\text{KV}$	A	B	PASS
N	/	$\pm 1\text{KV}$	A	B	PASS
PE	/	/	/	B	/
LN	/	$\pm 1\text{KV}$	A	B	PASS
L PE	/	/	/	B	/
N PE	/	/	/	B	/
Signal Line	/	/	/	/	/
Operation as intend, no loss of function during test and after test.					
Note: The minimum performance level per is less than 10%.					

10. Injection Current Test

10.1. Test Level and Performance Criteria

Test Level				Performance Criteria
Frequency	0.15-10.00MHz	10.00-30.00MHz	30.00-80.00MHz	A
Field Strength	3V	3-1V	1V	
Modulation	AM modulated to a depth of 80% by a sinusoidal audio signal of 1KHz(Note)			
Step Size	1% increments			
Dwell time	3 Sec.			

10.2. Test Procedure

The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).

The disturbance signal described below is injected to EUT through CDN.

The EUT operates within its operational mode(s) under intended climatic conditions after power on.


The frequency range is swept from 0.150MHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 400Hz sine wave.

The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally; the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.

Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

Set EUT in idle mode and repeated test with a receive antenna connected to a spectrum analyzer to see if there was unintentional transmissions happened.

10.3. Test Setup

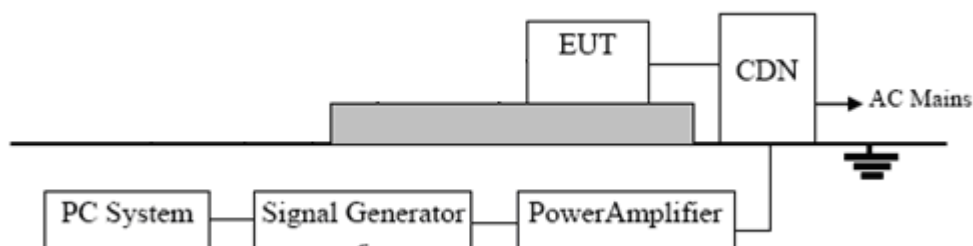

10.4. Test Result

Injected Position	Frequency	Strength (Unmodulated)	Observation	Required	Conclusion
AC mains	0.15-10.00MHz	3V	A	A	PASS
	10.00-30.00MHz	3V~1V	A	A	PASS
	30.00-80.00MHz	1V	A	A	PASS
<p>Note: During the test,the Maximum Bit Error Ratio was less than 1×10^{-3}</p> <p>During the test, the Maximum Block Error Ratio was less than 1×10^{-2}</p> <p>Note: The minimum performance level per is less than 10%.</p>					

11. Voltage Dips and Interruptions

11.1. Test Level and Performance Criteria

Test Level %UT	Duration (in period)	Performance Criterion
0	0.5P	B
0	1P	B
70	25P	B
0	250P	C

11.2. Test Procedure


The EUT and test generator were setup as shown on Section 10.3

The interruptions are introduced at selected phase angles with specified duration.

Record any degradation of performance.

Set EUT in idle mode and repeated test with a receive antenna connected to a spectrum analyzer to see if there was unintentional transmissions happened.

11.3. Test setup

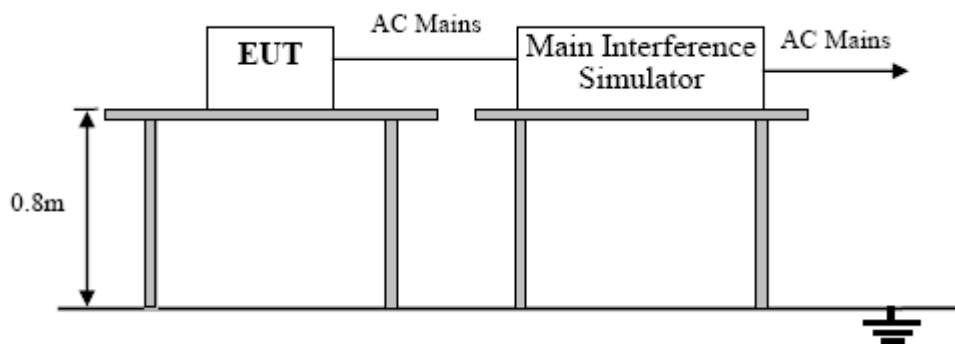

11.4. Test Result

Test Level % UT	Duration (in period)	Phase Angle	Observation	Require	Conclusion
0	0.5P	0-360	A	B	PASS
0	1P	0-360	A	B	PASS
70	25P	0-360	A	B	PASS
0	250P	0-360	A	C	PASS

Operation as intend, Self-recovery after temporary loss of function during the test.

Note: The minimum performance level per is less than 10%.

12. Surge Test

12.1. Test Level and Performance Criteria

Test level for AC mains ports		Performance Criterion
Line to Line	1KV	B
Line to ground	2KV	B
Test level for wired network ports		Performance Criterion
Line to ground	0.5KV	B

12.2. Test Procedure

Set up the EUT and test generator as shown on Section 11.2.2.

For line-to-line coupling mode, provide a 1kV 1.2/50us voltage surge (at pen-circuit condition) and 8/20us current surge to EUT selected points, and for active line / neutral lines to ground are same except test level is 2kV.


At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are applied during test.

Different phase angles are done individually.

Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

Set EUT in idle mode and repeated test with a receive antenna connected to a spectrum analyzer to see if there was unintentional transmissions happened.

12.3. Test Setup

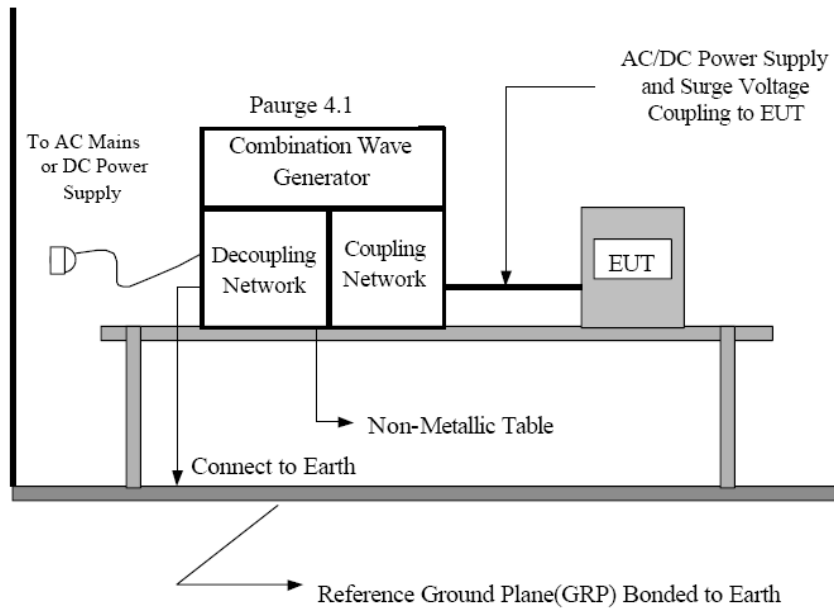

12.4. Test Result

The test data see in following page.



Location	Phase	Level 0.5/1KV		Observation	Require	Conclusion
		+	-			
L-N	0	A	A	A	B	PASS
	90	A	A	A	B	PASS
	180	A	A	A	B	PASS
	270	A	A	A	B	PASS
Location	Phase	Level 2KV		Observation	Require	Conclusion
		+	-			
L-PE	0	/	/	/	B	/
	90	/	/	/	B	/
	180	/	/	/	B	/
	270	/	/	/	B	/
Location	Phase	Level 2KV		Observation	Require	Conclusion
		+	-			
N-PE	0	/	/	/	B	/
	90	/	/	/	B	/
	180	/	/	/	B	/
	270	/	/	/	B	/
Location	Phase	Level 0.5KV		Observation	Require	Conclusion
		+	-			
Signal Port	/	/	/	/	/	/

Operation as intend, no loss of function during test and after test.

Note: The minimum performance level per is less than 10%.

13. Photos of Test Setup


13.1. Photos of Radiated Emission

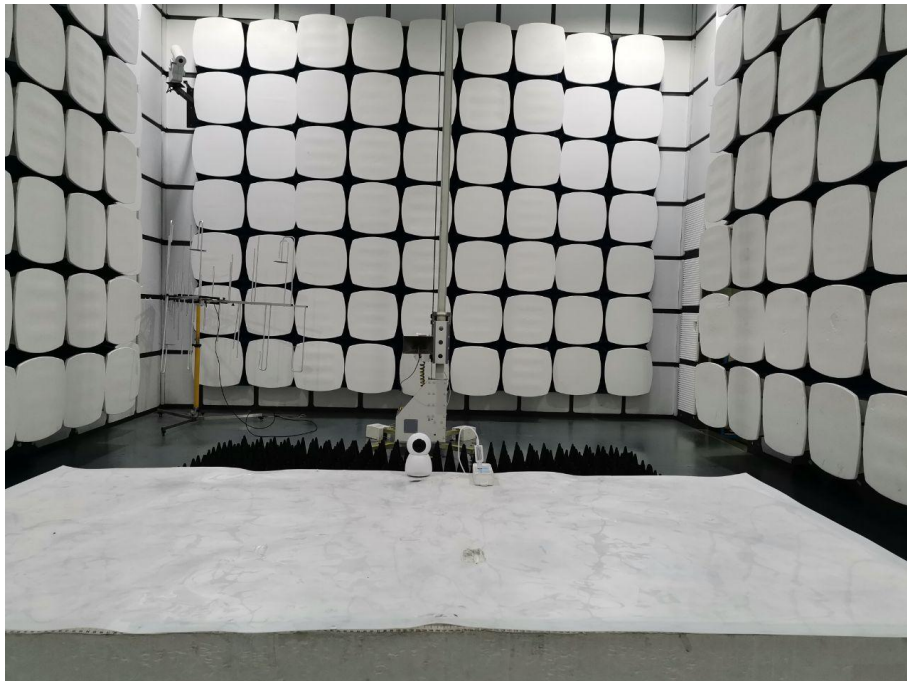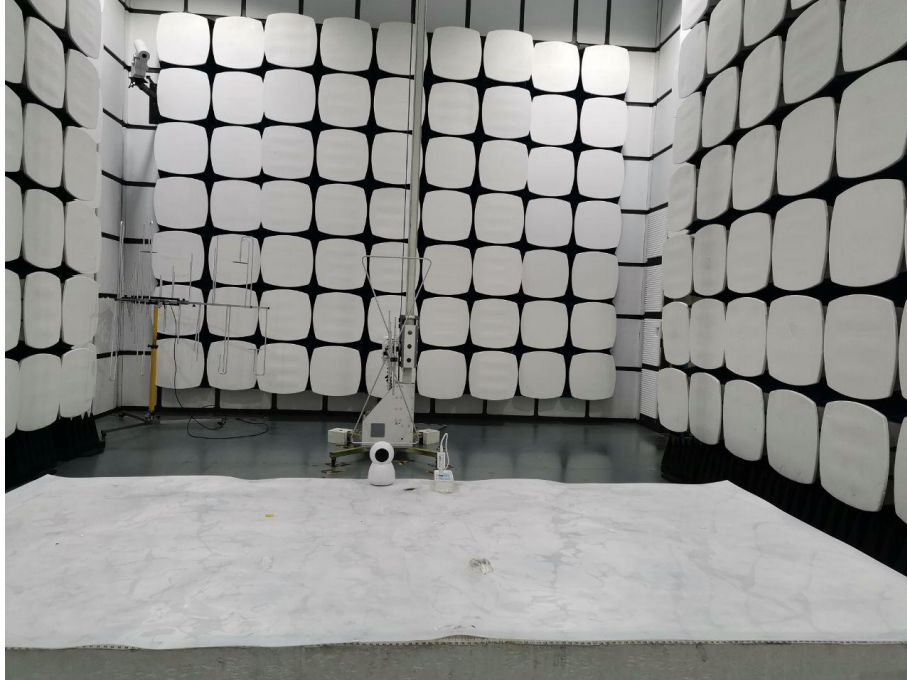


13.2. Photos of Power Line Conducted Emission Test



13.3. Photos of Electrostatic Discharge Immunity Test

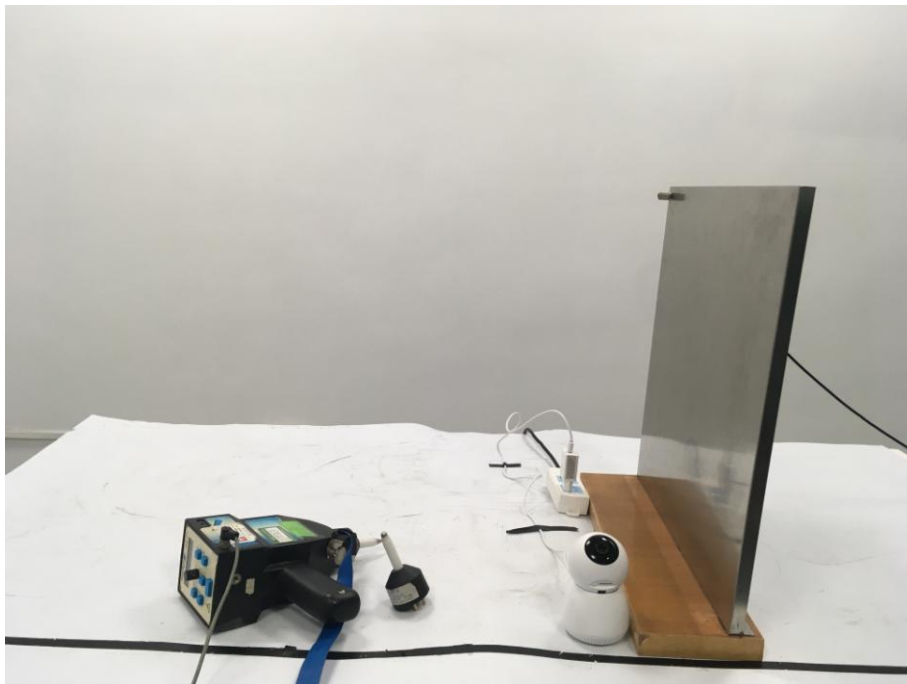

13.4. Photos of RF test

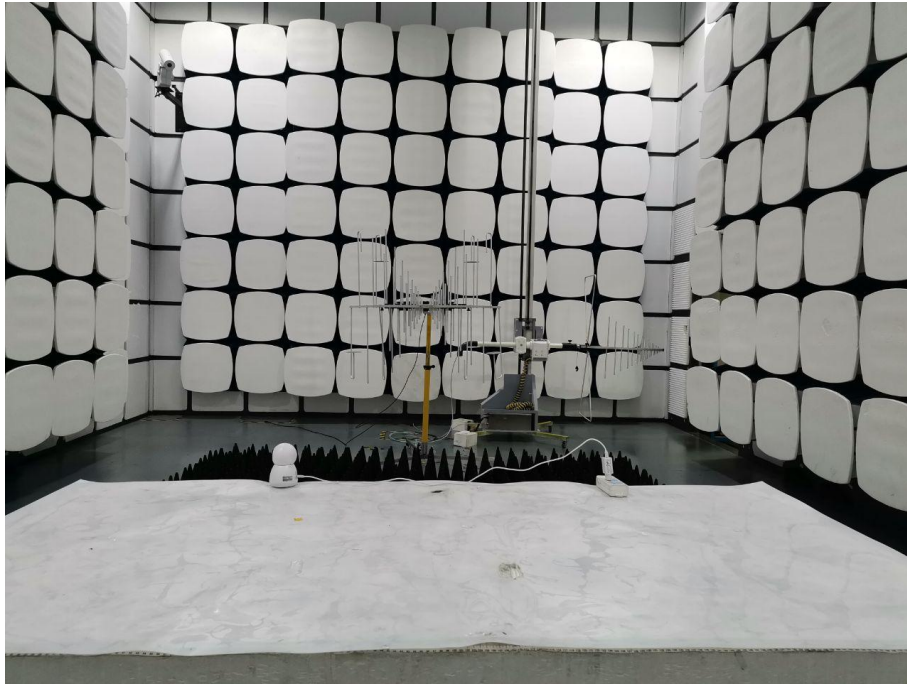


13.5. Photos of Harmonic & Flicker Test



13.6. Photo of Surge, Voltage Dips and interruptions, Electrical Fast Transient/Burst Immunity Test





13.7. Photo of Injected Currents Susceptibility test

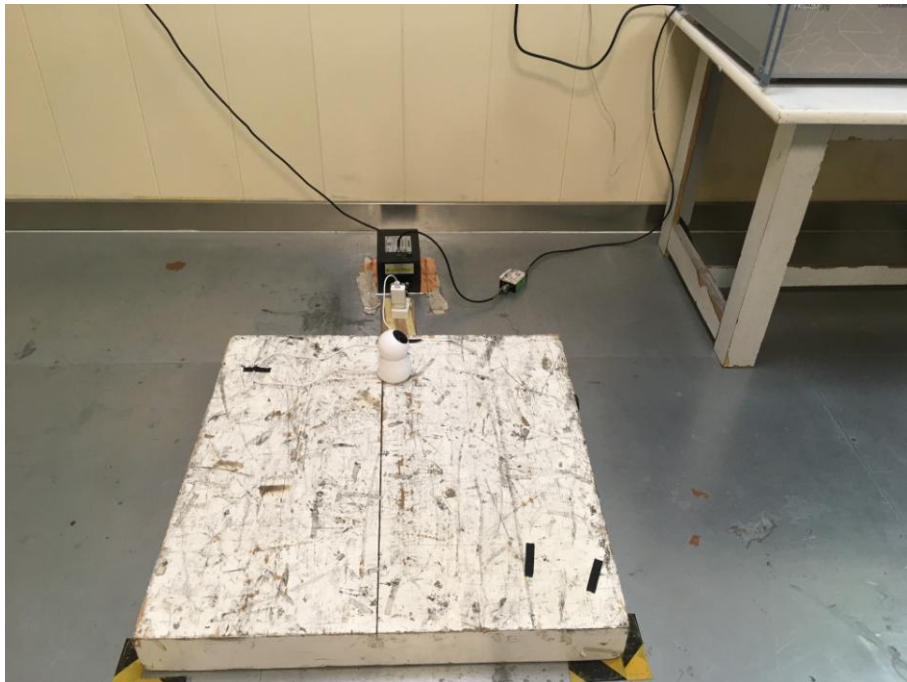




14. Photos of EUT








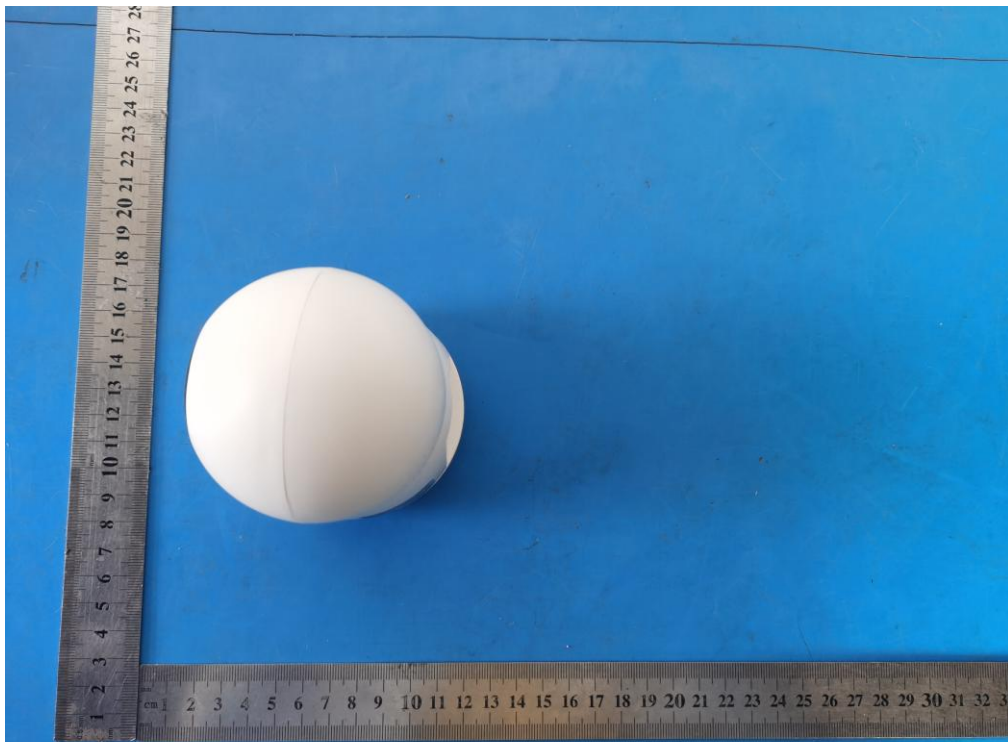
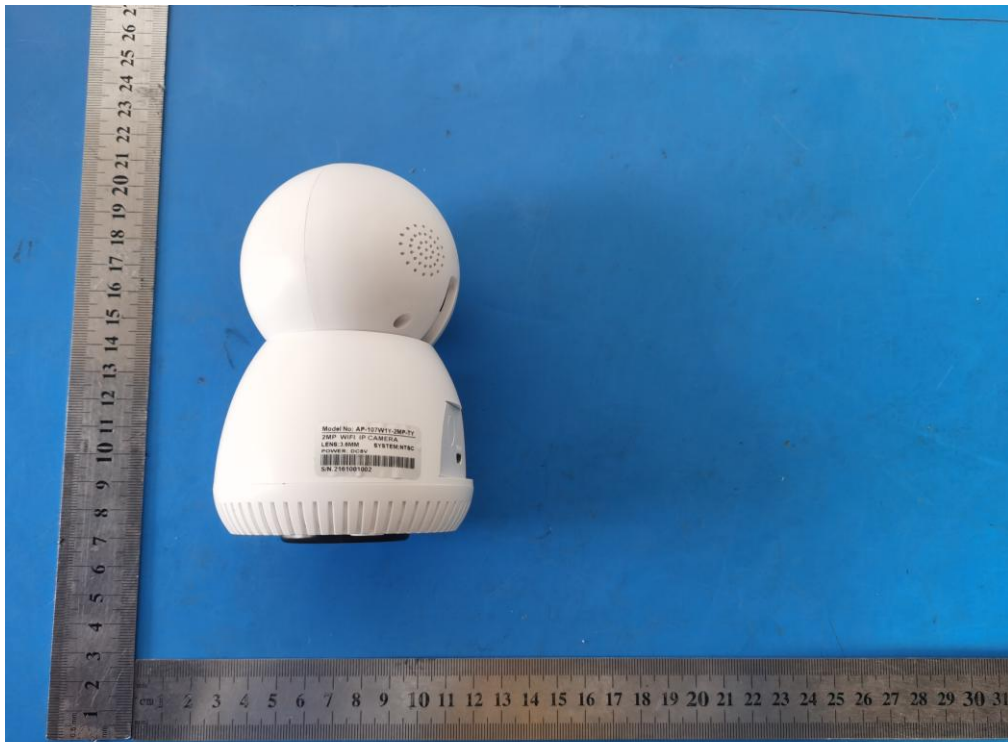


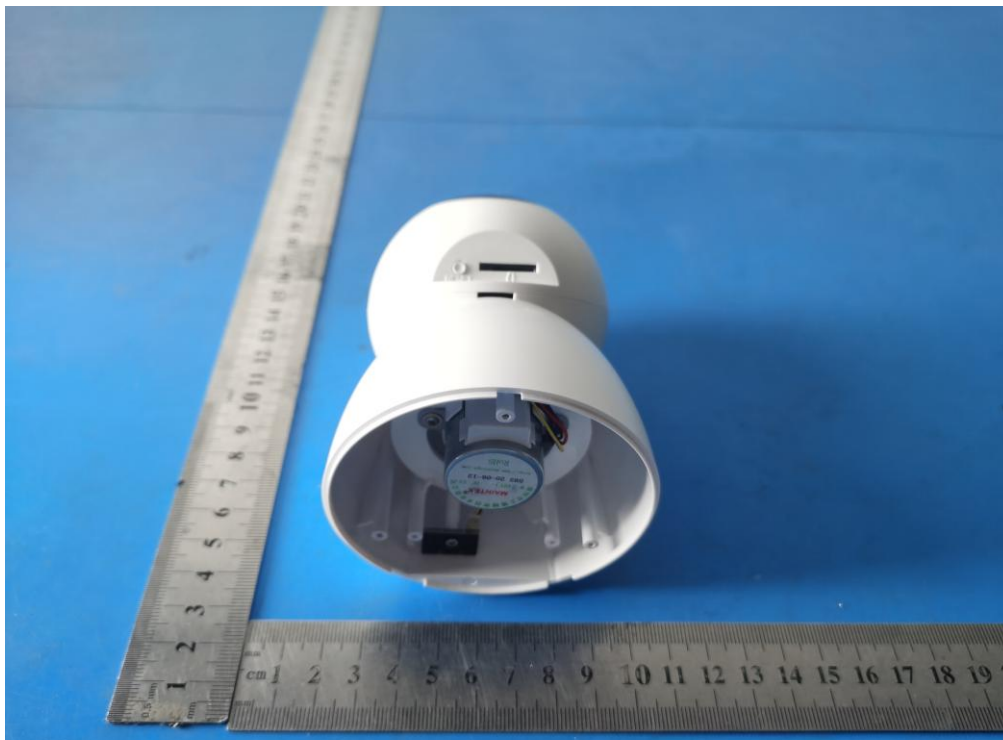


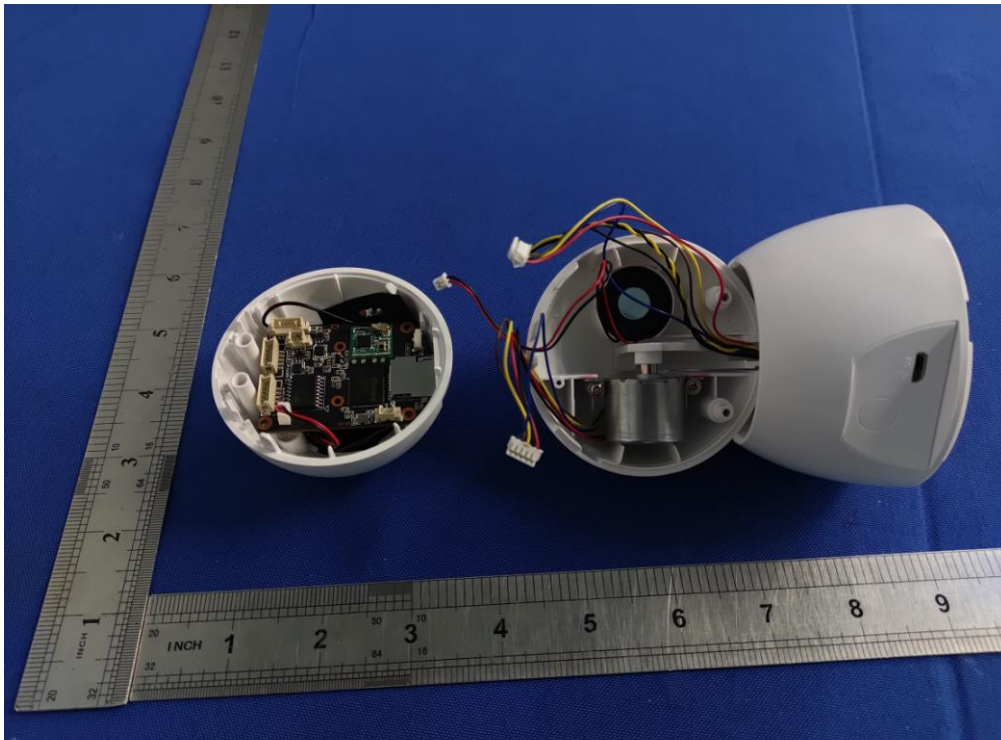
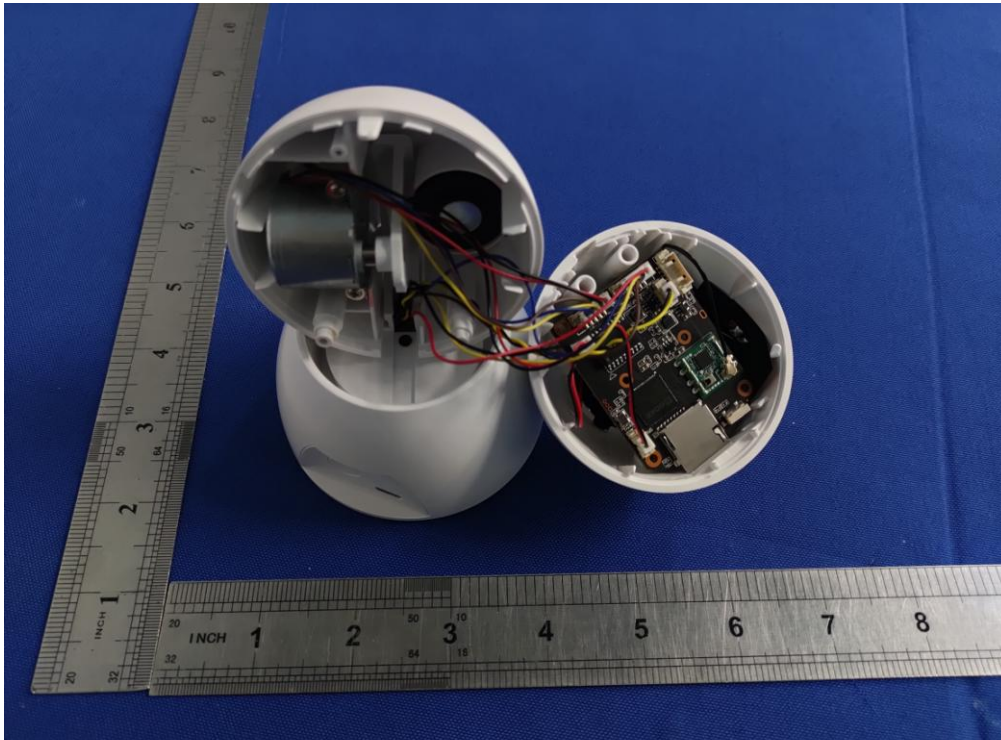


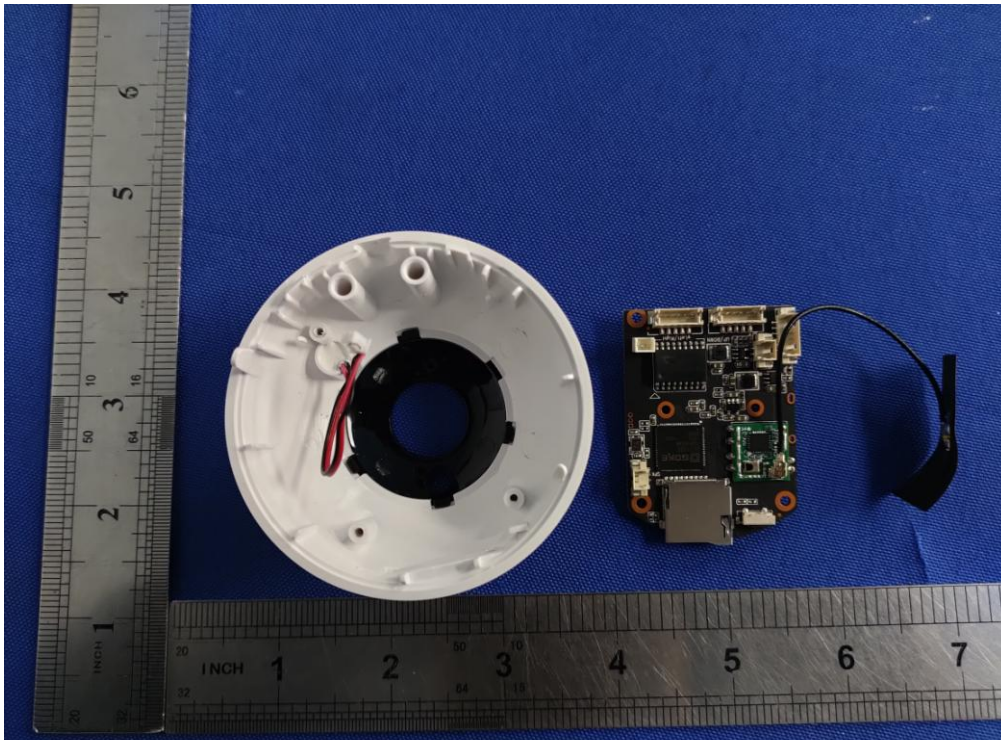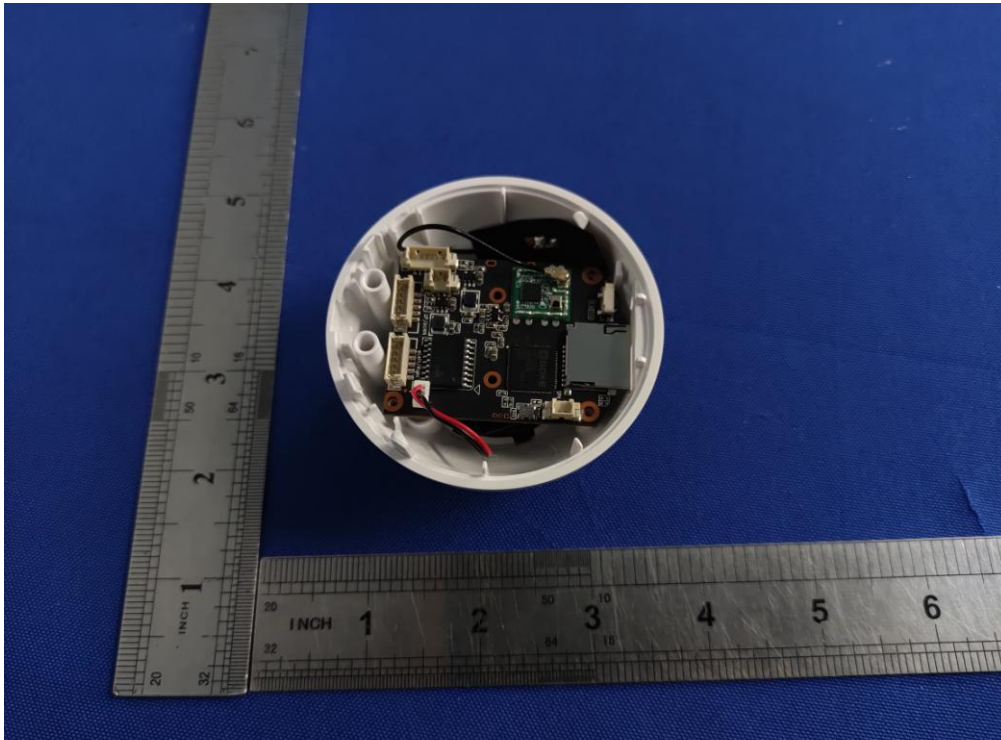


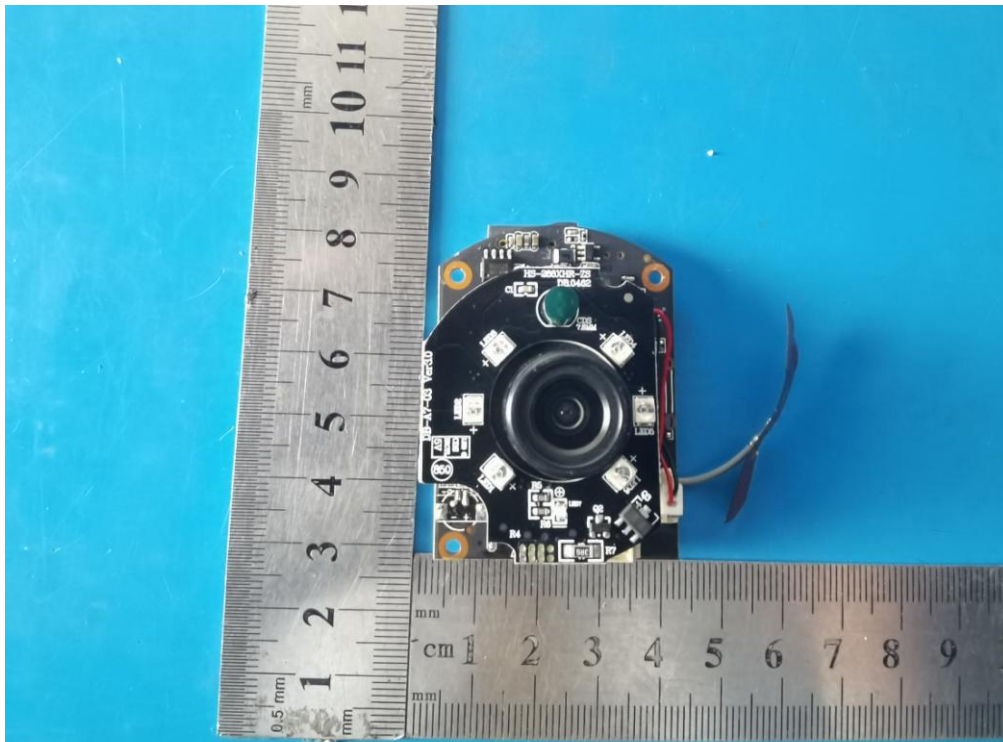

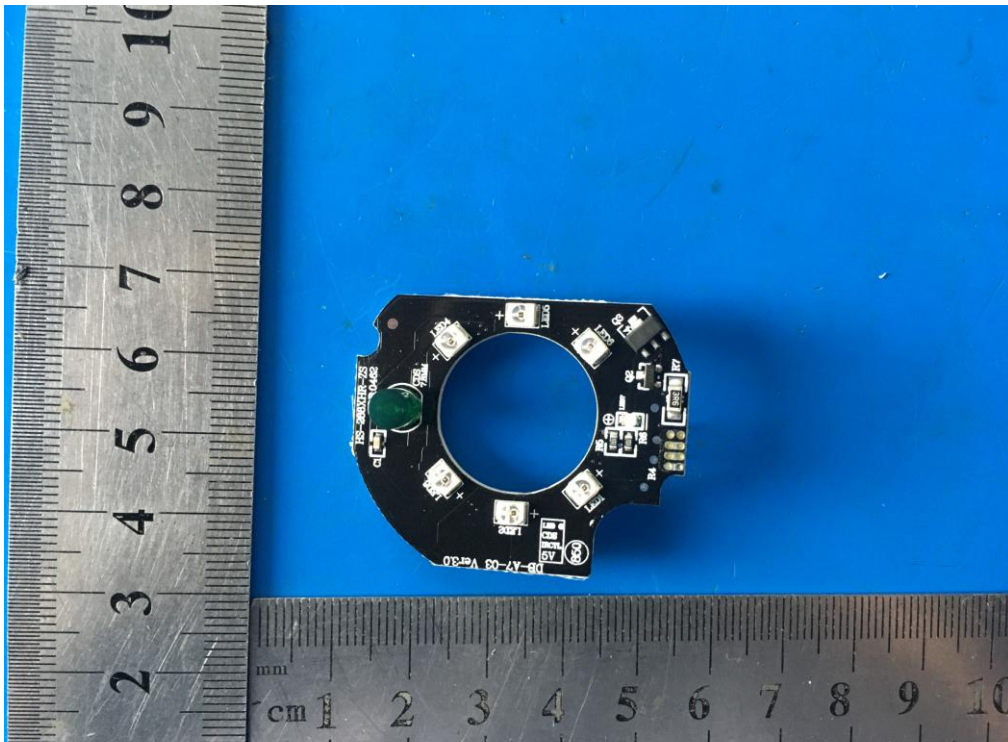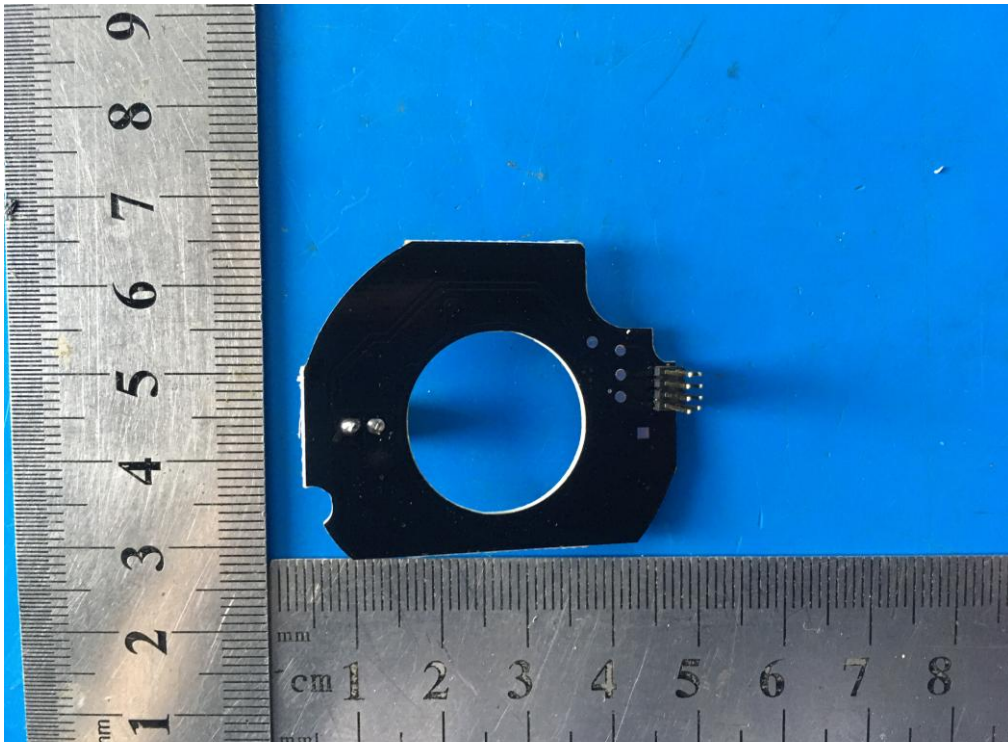

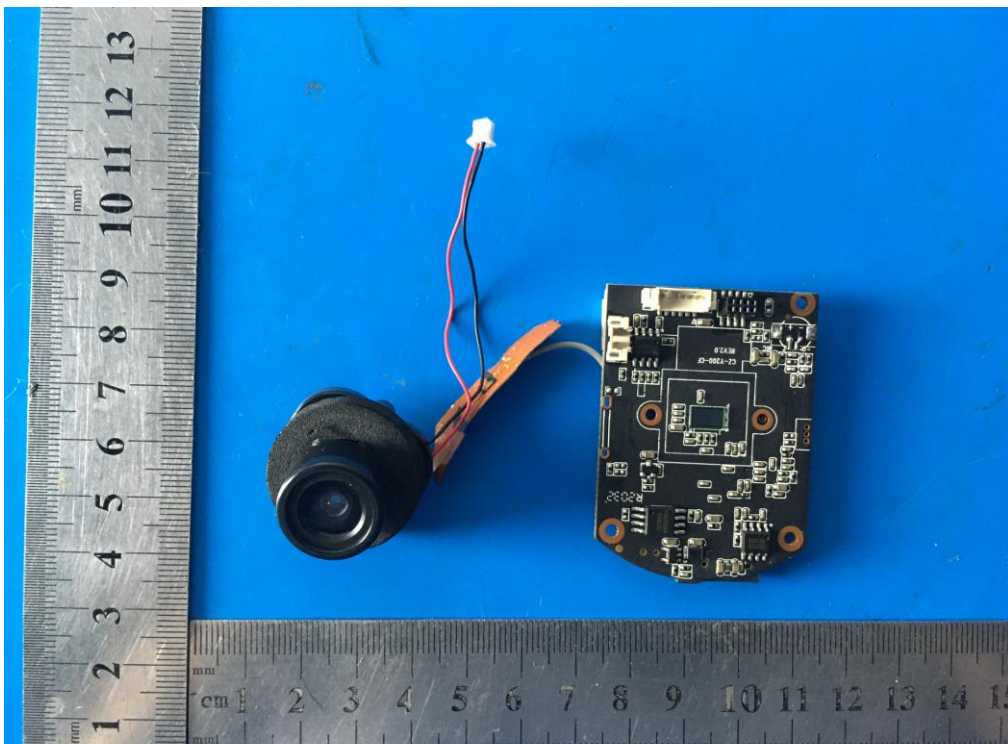

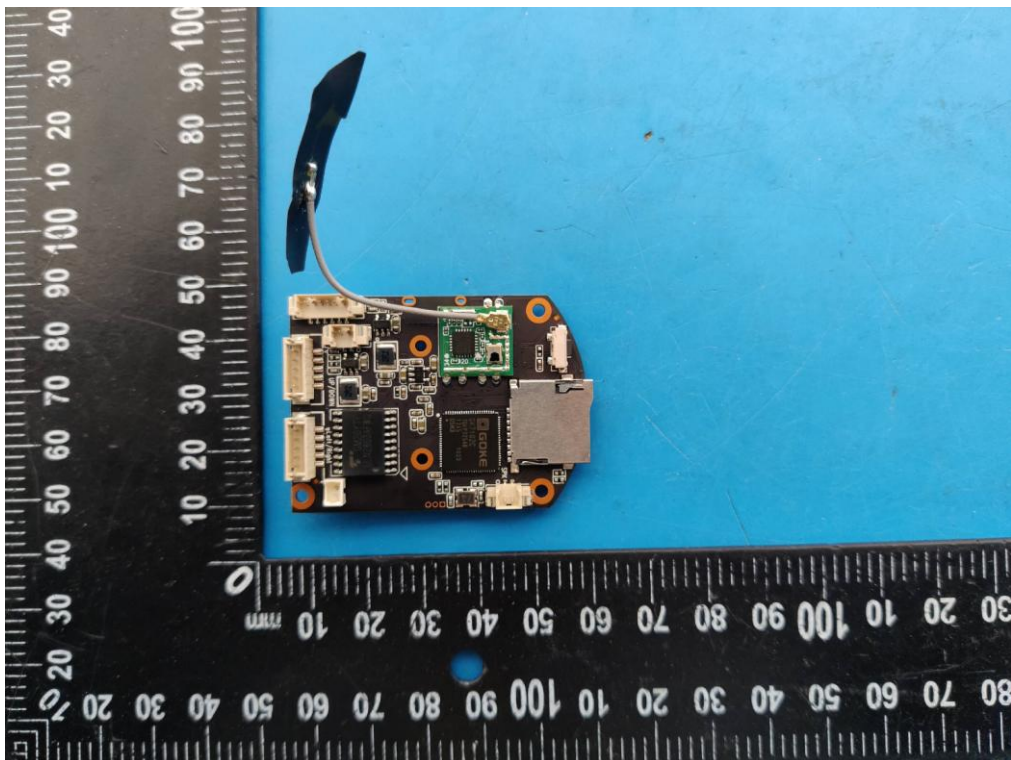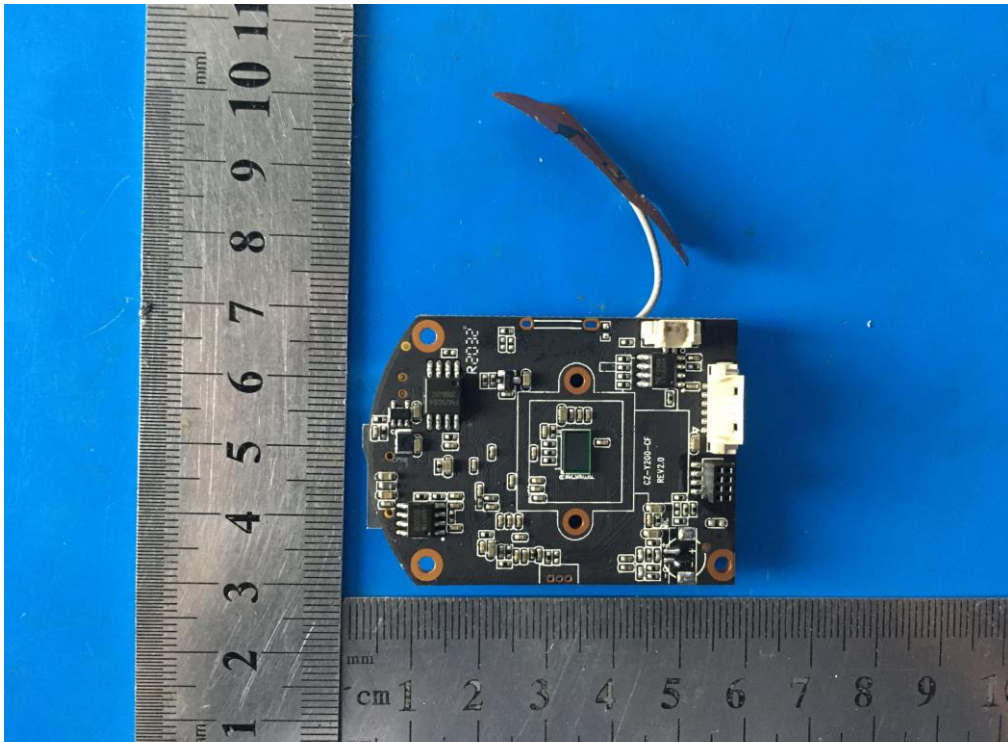

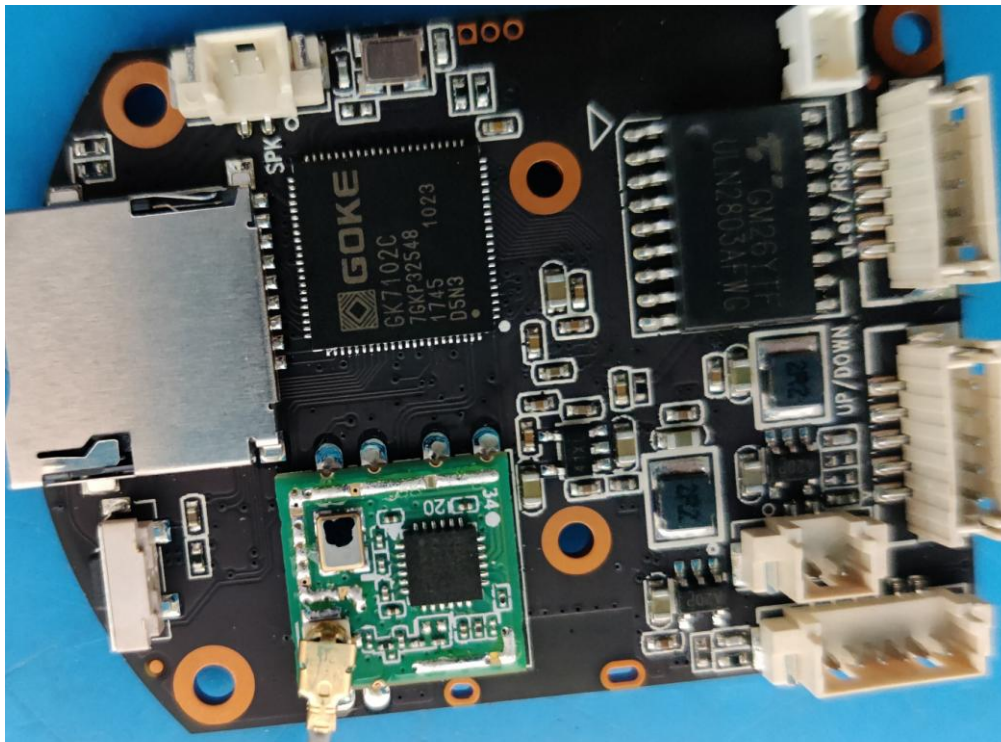

Annex

Model List		
AP-107W1Y-2MP-TY	AP-107W1-1MP-TY	AP-TY688ZD-1MP
AP-TY688ZD-2MP	AP-9826-10-TY-2MP	AP-TYB151-1MP
AP-TYB151-2MP	AP-TYB149-1MP	AP-VR-P1-130
AP-TYB150-1MP	AP-TYB150-2MP	AP-308ZD-1MP-TY
AP-308ZY-2MP-TY	AP-9826-10-TY-1MP	AP-228ZD-1MP-TY
AP-228ZDH-2MP-TY	AP-618ZD-1MP-TY	AP-K2-10TY
AP-K2-20TY	AP-P11-12-2MP-3.6-6	AP-P09-12-2MP
AP-P10-15-2MP	AP-B166-2MP-XM	AP-B166-1MP-TY
AP-B166-2MP-TY	AP-B166-1MP-AJ	AP-B166-2MP-AJ
AP-618ZDH-2MP-TY		

-----THE END OF REPORT-----